

Everything there is to know about the Cubit® shelving system
Instructions for a simple Cubit® shelf assembly

MODULAR INDIVIDUAL HIGH-QUALITY CUBIT SHELF



CUBIT®
BITS FOR
STORING

Assembly instructions
Individual shelf modules

THE CUBIT® SHELVING SYSTEM FORM FOLLOWS FUNCTION

34

FORMATS

—

8

DEPTH SIZES

—

24

COLORS

The modular shelf by Cubit®: More than four good sides

Every shelf body has been precisely constructed, lacquered by hand or refined with a veneer.

Completely module-based

Not only a shelf, but a one-of-a-kind design is created through creative combinations, stacking and hanging. Add a whole new dimension to your living room – focusing on usefulness and visual appearance.

Custom-fit modules for all common media

Create practical shelves for CDs, DVDs, ring binders, magazines, LPs, and books to fit common music and literature formats. Or if you'd prefer, you can create your very own sculpture by combining various heights and depths.



Assembly instructions
Stacking and hanging


SIMPLE ASSEMBLY WITH CLEVER CONNECTOR AND HOOK SYSTEM

How can I assemble my Cubit®s?

The clever connector and hook system enables a simple assembly regardless if the Cubit®s are placed, stacked or hung. For this, each Cubit® module has a circular slot on the rear side which forms the core of the intelligent shelf system.

Every Cubit® module has a slot on the rear side, which runs around the Cubit® module, providing the flexibility of the shelving system: This is how the various Cubit® modules can be connected to each other, on all sides and without screws - irrespective of their width, height or depth. Furthermore, the Cubit®s can be turned by 90°, which multiplies the creative possibilities.

The holes in the rear side enable a stable wall installation of your Cubit®s. Since all the modules are self-supporting, no limits are set on your creativity even in the case of floating shelves.

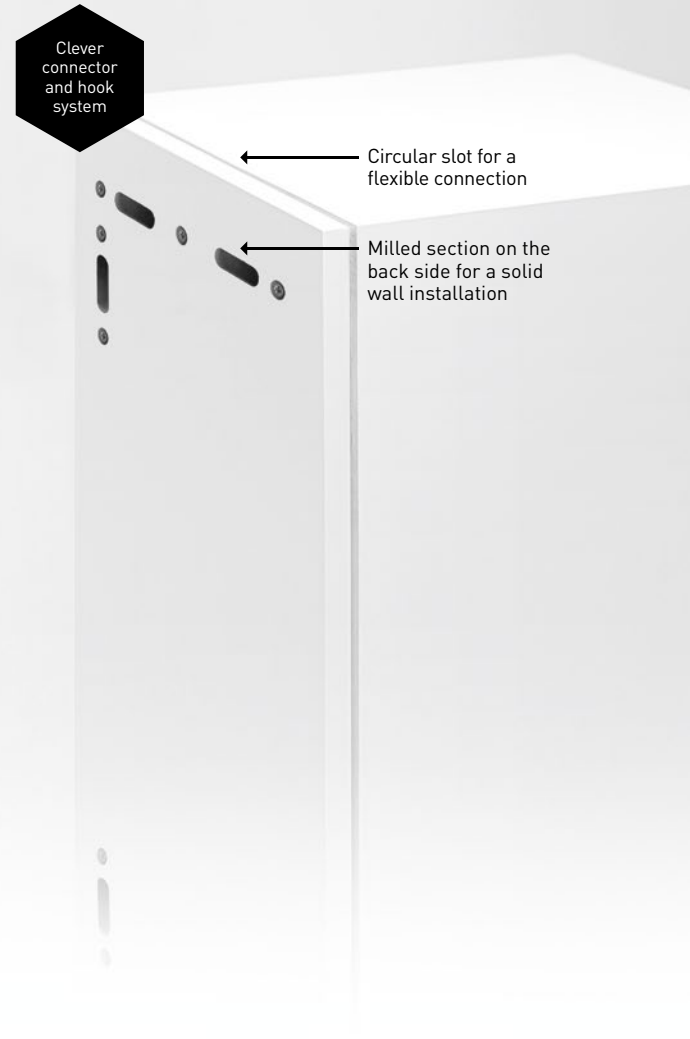

Assembly instructions
Stacking or hanging

CLEVER AND FLEXIBLE: CONNECT AND STACK YOUR CUBIT®S

Connect and stack - without drilling.

The individual Cubit®s arrive completely assembled.

The smart connector system functions like „tongue and groove“. The connection element, included with each module and the slot, which runs around each Cubit®, enables an unproblematic, tool-free and especially stable connection of your Cubit®s... Drilling is not necessary!

Our Tip: When starting the assembly, please make sure the surface is as flat and as level as possible.

A Stick connection element into the slot.
B Slot on the next Cubit® module. Finished!



A



B

Assembly instructions
Stacking or hanging

SIMPLE FASTENING OF THE CUBIT®S WITH THE UNIVERSAL DRILLING TEMPLATE

Installation – with the Cubit® universal drilling template.

Thanks to the hook system, you can also make individual Cubit®s float and thus use them as hanging shelves.

For a stable wall fixation, there are milled holes on the back of all Cubit®s. The module is positioned on the wall and the top left and right edges of the Cubit®s are marked with a sharp pencil (important!). Use the drilling template now to mark the drill holes. Drill the holes and screw on the hooks. Finally clip the Cubit® module on the hook.



5. Hang Cubit® module.
Finished!



1. Mark Cubit®'s top corners.



2. Mark drill holes with the drilling template.



3. Drill holes.



4. Fix hooks.

Assembly instructions

Fix and adjust

FIX OR LET THE SHELF FLOAT WITH CUBIT® HOOKS

When will I require the Cubit® hooks?

If you want your Cubit®s to be attached to the wall individually or as a whole bookcase, you will need hooks for wall fixation (these are included with every module).

Please understand that we can not assume liability for hanging, considering the local conditions.

The custom-fit, galvanized steel Cubit® hooks are delivered with two screws and fitting dowels and a self-adhesive spacer. You also will receive a drilling template which matches the Cubit® module perfectly and can be used to mark holes before drilling. Please have a size-6 drill ready.

Please take note: Under certain circumstances, Cubit® shelves have to be fixed to the wall. Those are especially:

- Straight-line, classical shelves, higher than 1.40 metres
- Free floating or protruding shelf modules
- Modules with doors or drawers



Assembly instructions
Adjust doors and hinges



CUBIT® DOOR ASSEMBLY AND ADJUSTMENT

Cubit® door adjustment.

The tip-on doors fitted with high quality hinges are pre-adjusted properly. If you want to rotate the module by 180 degrees, you will have to readjust the hinges with a screwdriver.

1 The door is adjusted too far to the outside or inside

By loosening the screw, the door becomes movable at the hinge. In this way, the door can be adapted precisely to the module frame. Tighten the screw again after this.

2 Adjust the gap size above and below

Adjust the screw in order to modify the gap size at the upper and lower edges.

Left door hinge:

In clockwise direction – adjust the door downwards (and vice versa)

Right door hinge:

In clockwise direction – adjust the door upwards (and vice versa)

3 Adjust the gap size on the left and right sides

Adjust the screw in order to modify the gap size at the left and right edges.

Left door hinge:

In clockwise direction – adjust the door towards the left side (and vice versa)

Right door hinge:

In clockwise direction – adjust the door towards the right side (and vice versa)

Assembly instructions

Stands, bases & hifi modules



CUBIT® STAND AND BASE

How can I mount Cubit® to a stand/base?

You can apply the basic principle of "tongue and groove" to "sticking and stacking". For this purpose, we have pre-assembled the connecting elements at the backside of the stand. Modules can be easily inserted into the stand.

Bases can be used if...

- objects cannot be fastened directly on the wall because of skirting boards
- modules cannot be easily placed on the floor because of unevenness
- a base has been chosen for aesthetic reasons

Place the base as close as possible to the wall. By unscrewing the feet on the bottom of the base, irregularities of the ground can be compensated (please use a level). Modules can then be placed on the base.



Notice:

- a module should not protrude more than $\frac{1}{4}$ of its length, otherwise it needs to be fastened to the wall with a hook
- Maximum load capacities may not be crossed. Please consider the relevant instructions in the configurator

Assembly instructions

Assembly of Cubit® hifi modules


ASSEMBLY AND ADJUSTMENT OF HIFI MODULES

All hifi modules are equipped with an opening at the backside through which a cable can be fed. Entertainment devices can thereby be integrated into the furniture and can be connected with each other.

You can adjust the brake force to allow for even smoother door-openings. Tightening the screw will increase the brake force and unscrewing releases tension.



Configuration examples and cable routing

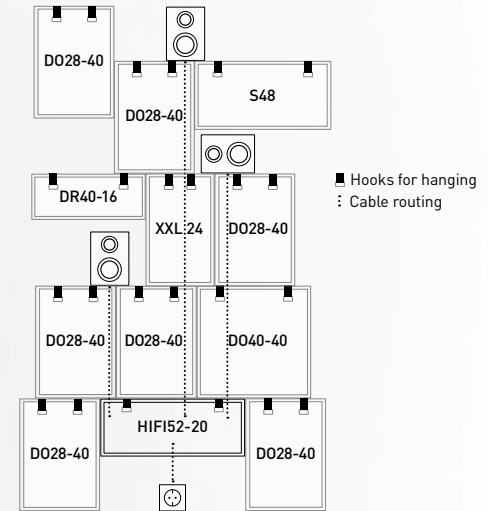

Important notice:


- First feed the cable through the opening then attach the module
- Cables up to a diameter of 6 mm can be placed behind the modules
- When ordering the hifi module, the delivery will also include all 6 mm spacers to match all modules of that order
- If you wish to place the cables behind several modules, all modules should be mounted with spacers
- When using the entertainment device the hifi module should be opened (risk of over-heating!)

Assembly instructions

Assembly examples

Customer examples for fixing stacked shelves to the wall.

Here you can see some customer examples including our assembly instructions.

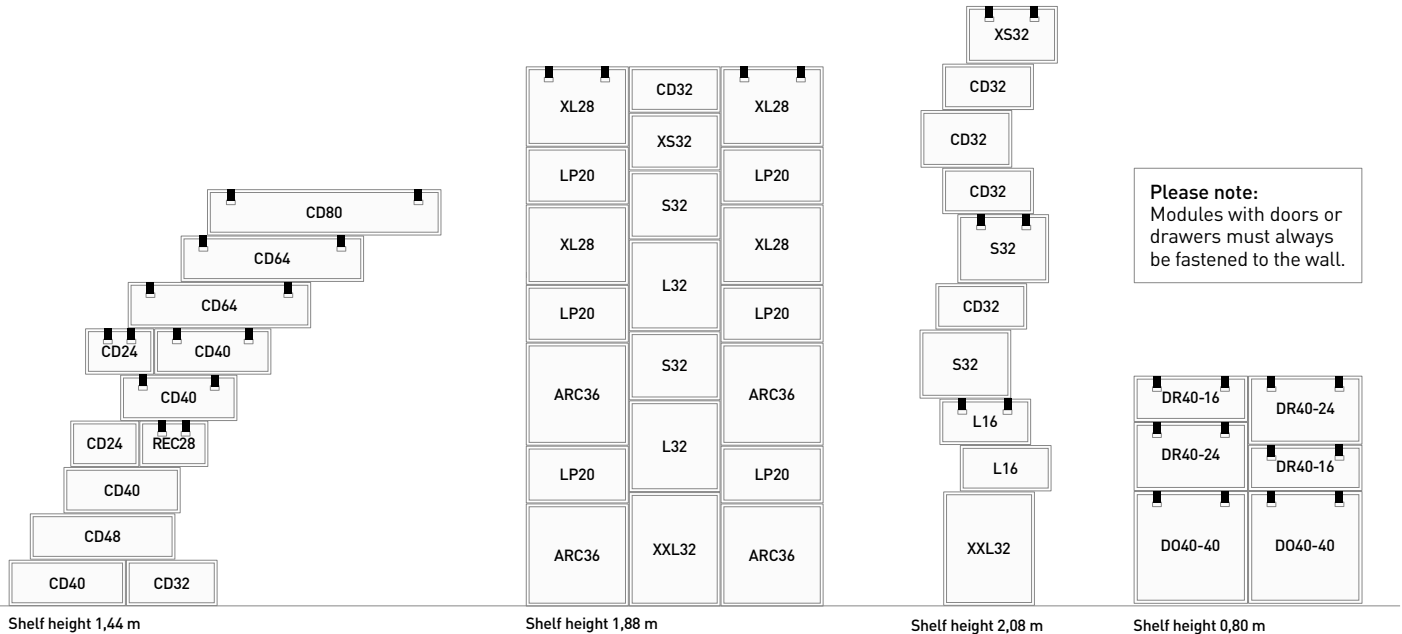


Assembly instructions



Assembly examples

Make individual Cubit®s float.


Here you can see some customer samples including our installation instructions.

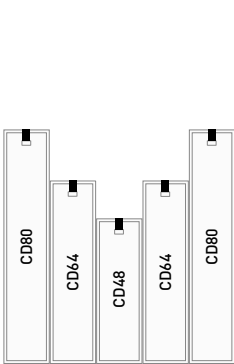

Vertically hung CD shelves

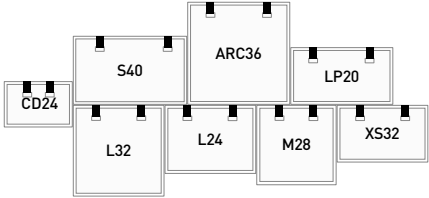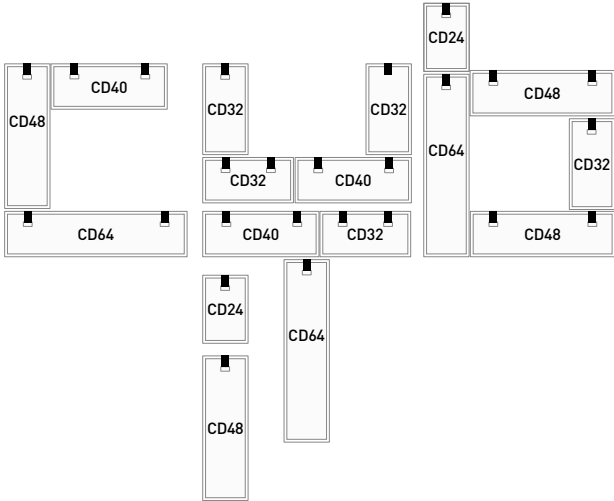

Different Cubit® formats floating



Floating Cubit® shelf

Assembly instructions

Cubit® formats

Overview of the shelf formats.

CD FORMATS



CD24

W24 x H16 x D17,2



CD32

W32 x H16 x D17,2



CD40

W40 x H16 x D17,2



CD48

W48 x H16 x D17,2



CD64

W64 x H16 x D17,2



CD80

W80 x H16 x D17,2

BOOK FORMATS




XS32

W32 x H20 x D15,2



S24

W24 x H24 x D17,2



S32

W32 x H24 x D17,2




S40

W40 x H24 x D17,2



S48

W48 x H24 x D17,2



M28

W28 x H28 x D21,2



RECLAM28


W28 x H18 x D13,2

LARGE BOOK FORMATS




L16

W16 x H32 x D25,2




L24

W24 x H32 x D25,2




L32

W32 x H32 x D25,2




XL28

W28 x H36 x T29,2




XXL24

W24 x H40 x D33,2



XXL32


W32 x H40 x D33,2



3XL40

W40 x H40 x D37,2

RING BINDERS/LPS/ON TOP-MODULES




ARC36

W36 x H36 x D33,2




LP20

W20 x H36 x D37,2



OT36-16

W36 x H16 x D37,2



OT36-24


W36 x H24 x D37,2

Notice:
On-top modules are not intended
for hanging.


Assembly instructions

Cubit® formats


DOORS/DRAWERS FORMATS




D028-28
W 28 x H 28 x D 29,2




D028-40
W 28 x H 40 x D 37,2




D032-32
W 32 x H 32 x D 33,2




D036-36
W 36 x H 36 x D 33,2



D040-40
W 40 x H 40 x D 37,2




DR40-16
W 40 x H 16 x D 37,2




DR40-24
W 40 x H 24 x D 37,2

Please note:
Doors and drawers should always be fixed to the wall.


MULTIMEDIA SHELVES



HIFI36-24
W 36 x H 24 x D 37,2




HIFI48-24
W 48 x H 24 x D 37,2



HIFI52-20
W 52 x H 20 x D 41,2

STANDS




SB40-20-G
W 39 x H 20 x D 30



SB80-20-G
W 79 x H 20 x D 30



SB120-20-G
W 119 x H 20 x D 30



SB40-20-S
W 39 x H 20 x D 30



SB80-20-S
W 79 x H 20 x D 30



SB120-20-S
W 119 x H 20 x D 30

BASE



PL40-8
W 40 x H 8 x D 25



PL80-8
W 80 x H 8 x D 25



PL40-16
W 40 x H 16 x D 25



PL80-16
W 80 x H 16 x D 25

Assembly instructions

Shelf details

Overview of the shelf formats

	Module	External dimension (in cm)			Internal dimension (in cm)			Designed for	Weight	Maximum additional load
		w	h	d	w	h	d			
CD FORMATS	CD24	24	16	17,2	22	14	14,4	CD	1,6 kg	2 kg
	CD32	32	16	17,2	30	14	14,4	CD	2,1 kg	3 kg
	CD40	40	16	17,2	38	14	14,4	CD	2,6 kg	4 kg
	CD48	48	16	17,2	46	14	14,4	CD	3,0 kg	5 kg
	CD64	64	16	17,2	62	14	14,4	CD	4,0 kg	6 kg
	CD80	80	16	17,2	78	14	14,4	CD	5,0 kg	8 kg

BOOK FORMATS

XS32	32	20	15,2	30	18	12,4	Pocket books	2,4 kg	4 kg
S24	24	24	17,2	22	22	14,4	Pocket books, DVD	2,2 kg	4 kg
S32	32	24	17,2	30	22	14,4	Pocket books, DVD	2,8 kg	5 kg
S40	40	24	17,2	38	22	14,4	Pocket books, DVD	3,5 kg	7 kg
S48	48	24	17,2	46	22	14,4	Pocket books, DVD	4,1 kg	9 kg
M28	28	28	21,2	26	26	18,4	Pocket books, DVD	3,3 kg	8 kg
REC28	28	18	13,2	26	16	10,4	Paperbacks	1,7 kg	3 kg

LARGE BOOKS FORMATS

L16	16	32	25,2	14	30	22,4	Large books	2,8 kg	8 kg
L24	24	32	25,2	22	30	22,4	Large books	3,6 kg	14 kg
L32	32	32	25,2	30	30	22,4	Large books	4,6 kg	18 kg
XL28	28	36	29,2	26	34	26,4	Extra large books	4,9 kg	15 kg
XXL24	24	40	33,2	22	38	30,4	Extra large books	5,2 kg	15 kg
XXL32	32	40	33,2	30	38	30,4	Extra large books	6,3 kg	22 kg
3XL40	40	40	37,2	38	38	34,4	Extra large books	7,5 kg	30 kg

RING BINDERS/LPS/ ON TOP-MODULES

ARC36	36	36	33,2	34	34	30,4	Ring binders	6,5 kg	15 kg
LP20	20	36	37,2	18	34	34,4	LP	4,7 kg	12 kg
OT36-16	36	16	37,2	34	15	33,5	LPS, bottles	3,5 kg	16 kg
OT36-24	36	24	37,2	34	23	33,5	LPS, bottles	4,6 kg	18 kg

Assembly instructions

Shelf details

DOORS / DRAWERS FORMATS

DO28-28	28	28	29,2	26	26	24,5	Midsized books	5,3 kg	23 kg
DO28-40	28	40	37,2	26	38	32,5	Midsized books	7,7 kg	25 kg
DO32-32	32	32	33,2	30	30	28,5	Large books	7,0 kg	25 kg
DO36-36	36	36	33,2	34	34	28,5	Extra large books	8,8 kg	28 kg
DO40-40	40	40	37,2	38	38	32,5	Ring binders, Extra large books	9,9 kg	30 kg
DR40-16	40	16	37,2	33,7	11	26,5	Accessories	6,8 kg	10 kg
DR40-24	40	24	37,2	33,7	19	26,5	CD, DVD	8,8 kg	15 kg

MULTIMEDIA SHELVES

HIFI36-24	36	24	37,2	31,2	18,5	32,6	Hifi-receiver	8,65 kg	16 kg
HIFI48-24	48	24	37,2	43,2	18,5	32,6	Hifi-receiver	9,05 kg	18 kg
HIFI52-20	52	20	41,2	47,2	14,5	36,6	Hifi-receiver	10,65 kg	20 kg

Stands and bases

STANDS

Module	External dimension (in cm)			Legs	Type	Weight	Maximum additional load
	w	h	d				
SB40-20-G	39	20	30	straight	Stand	3,7 kg	100 kg
SB80-20-G	79	20	30	straight	Stand	6,3 kg	100 kg
SB120-20-G	119	20	30	straight	Stand	8,5 kg	100 kg
SB40-20-S	39	20	30	slanted	Stand	3,6 kg	80 kg
SB80-20-S	79	20	30	slanted	Stand	6,0 kg	80 kg
SB120-20-S	119	20	30	slanted	Stand	8,4 kg	80 kg

BASE

PL40-8	40	8	25	-	Base	1,9 kg	150 kg
PL80-8	80	8	25	-	Base	3,3 kg	150 kg
PL40-16	40	16	25	-	Base	3,1 kg	150 kg
PL80-16	80	16	25	-	Base	4,6 kg	150 kg

Thank you for choosing Cubit®.

MAKE YOUR SHELVING DREAMS COME TRUE - WITH CUBIT®!

Further information and Cubit® planner at www.cubit-shop.com

Do you have any further questions or suggestions? Please contact the Cubit Team by telephone +49 (0)2 11.9 99 14 50 or by email at contact@cubit-shop.com. We are there for you from Monday to Friday between 9 am -1 pm and 2 - 6 pm.

CUBIT®
BITS FOR
STORING